Manistee County Road Commission

8946 Chippewa Highway • Bear Lake, Michigan 49614 • (231) 889-0000 • Fax (231) 889-0011

Media Release
Glovers Lake Road 2022 Resurfacing
Pleasanton Township, Manistee County

The Manistee County Road Commission (MCRC) has announced that construction will begin for the resurfacing of 1.62 mile of Glovers Lake Road from East of Zilch Road to East of Keillor Road in Pleasanton Township beginning on or about July 5, 2022 and the project is expected to be completed by or before August 26, 2022.

This will be the final segment of the 6.50 miles total length of Glovers Lake Road to be improved between M-22 in the un-incorporated Village of Arcadia to State Highway US-31.

According to Mark Sohlden, Road Commission Manager, the scope of construction work will include crushing and shaping of the existing blacktop pavement, trenching, aggregate base widenings, Hot Mix Asphalt (HMA) paving, aggregate shoulders, intersection improvements, pavement markings, permanent signing, and miscellaneous improvements. The new HMA pavement will be constructed at a width of 28' which will include two 11' wide traffic lanes and 3' wide partially paved shoulders.

The project will be funded with Federal Surface Transportation Program (STP) funds, Federal Highway Infrastructure Program COVID funds (up to $100,000), State Category D funds, and MCRC funds and the project low bid of $661,819.94 was submitted by Elmer's Crane and Dozer, Inc. of Traverse City, Michigan to the Michigan Department of Transportation (MDOT) in Lansing on April 1, 2022.

According to Sohlden, Glovers Lake Road within the limits of the project will be closed to "through traffic" during construction and "through traffic" will be detoured via Gilbert Road, Norconk Road, and Butwell Road with proper detour signing and barricading.
"Local traffic" and access to residential and commercial drives within the limits of the project will be maintained at all times with minimal disruption, and Emergency Services vehicle access to and through the site will be maintained at all times during construction.

The Manistee County Road Commission will be replacing one cross road culvert near Letteau Road during the week of June 27th in advance of the resurfacing project.

Sohlden asks for cooperation and patience from the traveling public during this key road resurfacing project and said to contact the MCRC at telephone number 231.889.0000 if you have any questions regarding the project.
Date: 6/06/22

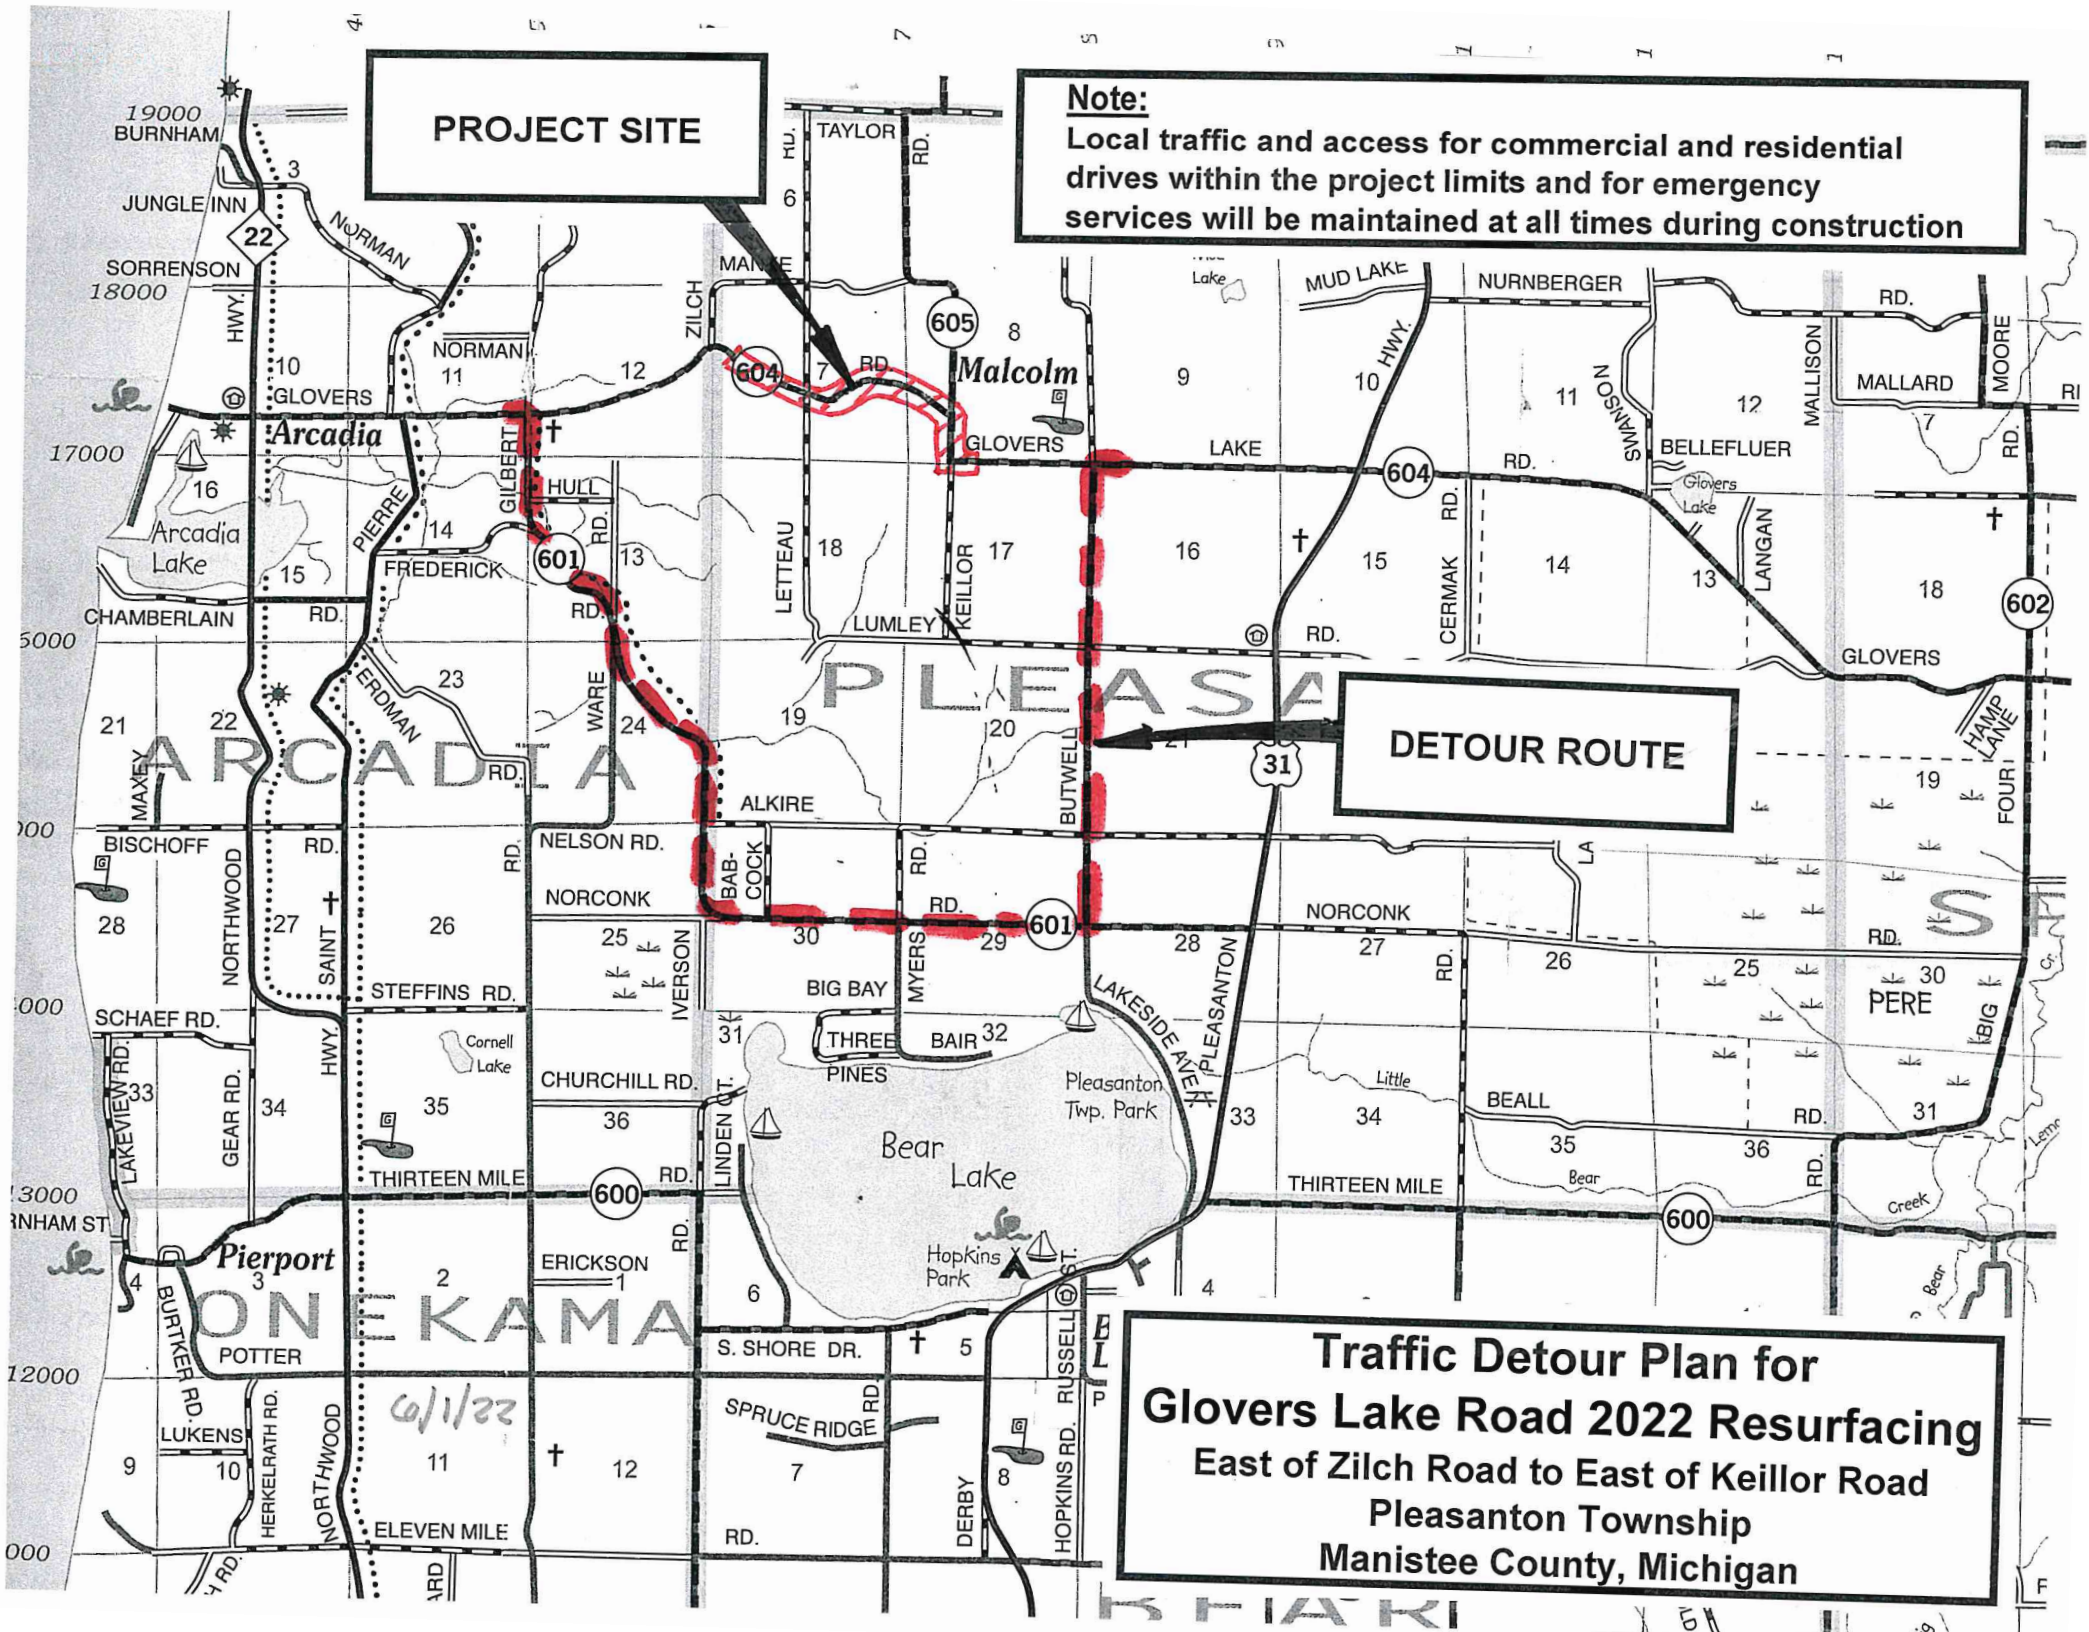
PROJECT SITE
Note:
Local traffic and access for commercial and residential drives within the project limits and for emergency services will be maintained at all times during construction
DETOUR ROUTE
Traffic Detour Plan for
Glovers Lake Road 2022 Resurfacing
East of Zilch Road to East of Keillor Road
Pleasanton Township
Manistee County, Michigan
6/1/22
Arcadia
Malcolm
Pierport
Arcadia Lake
Bear Lake
Pleasanton Twp. Park
Hopkins Park
Cornell Lake
Glovers Lake
ARCADIA
PLEASA
ONEKAMA
PERE
BURNHAM
JUNGLE INN
SORRENSON
GLOVERS
NORMAN
HULL
FREDERICK
CHAMBERLAIN
ERDMAN
NELSON RD.
NORCONK
ALKIRE
BIG BAY
THREE PINES
BAIR
CHURCHILL RD.
STEFFINS RD.
THIRTEEN MILE
ERICKSON
S. SHORE DR.
SPRUCE RIDGE
ELEVEN MILE
POTTER
LUKENS
BISCHOFF
SCHAEF RD.
LAKEVIEW RD.
GEAR RD.
NORTHWOOD
SAINT
HWY.
PIERRE
GILBERT
WARE
ZILCH
LETTEAU
LUMLEY
KEILLOR
BUTWELL
MYERS
BAB-COCK
IVERSON
LINDEN CT.
LAKESIDE AVE.
PLEASANTON
CERMAK
SWANSON
MALLISON
MALLARD
MOORE
BELLEFLUER
LANGAN
MUD LAKE
NURNBERGER
TAYLOR
MAXEY
BURTKER RD.
HERKELRATH RD.
DERBY
HOPKINS RD.
RUSSELL
BEALL
Little
Bear
Creek
HAMP LANE
FOUR
BIG
22
604
605
601
602
31
600